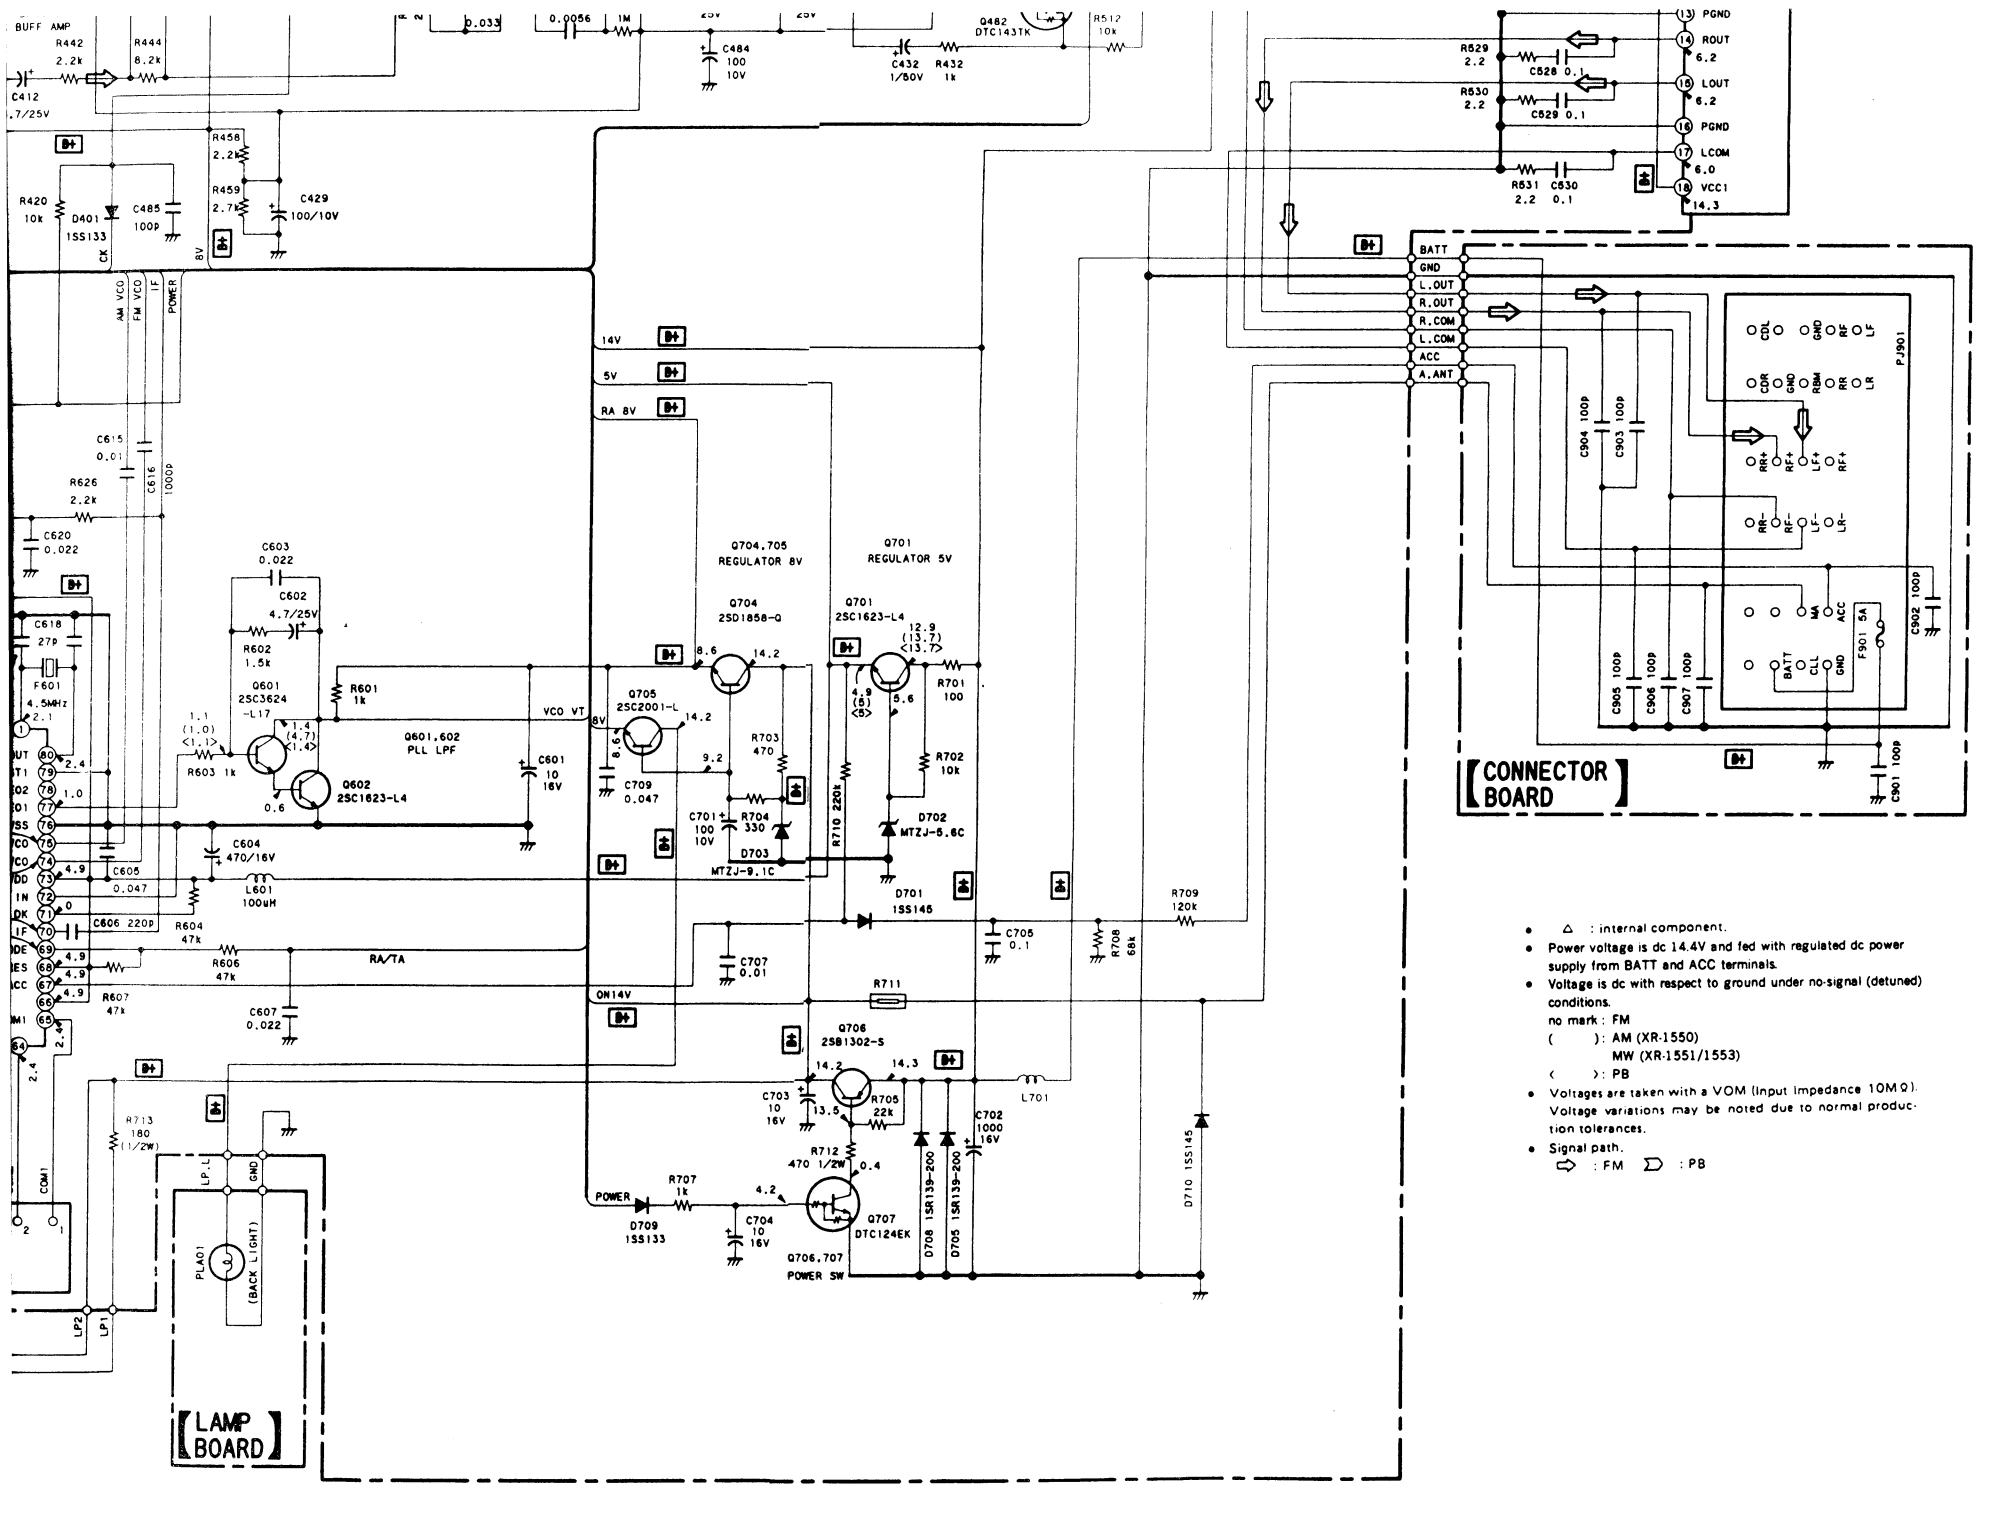


- △ : internal component.
- Power voltage is dc 14.4V and fed with regulated dc power supply from BATT and ACC terminals.
- Voltage is dc with respect to ground under no-signal (detuned) conditions.
  no mark : FM
  ( ) : AM (XR-1550)
  MW (XR-1551/1553)
  < > : PB
- Voltages are taken with a VOM (Input impedance 10MΩ). Voltage variations may be noted due to normal production tolerances.
- Signal path.
  ⇨ : FM ⇨ : PB